


Requires to install the connected starter pack and one or more «... with Netatmo» connected switch, micromodule or socket outlet.

Module Control

Gateway power outlet and home/
away wireless master switch


Mobile gateway
power outlet

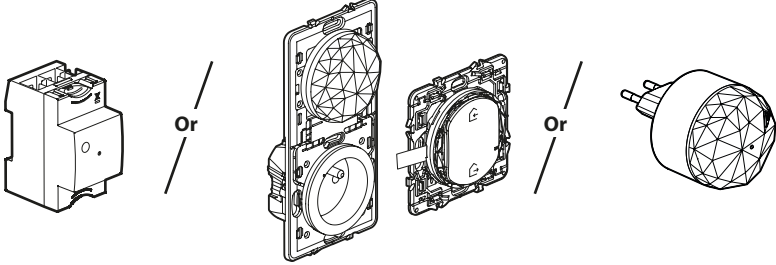

Pack contents:

Wireless, batteryless
lighting control


 Stickers
x2

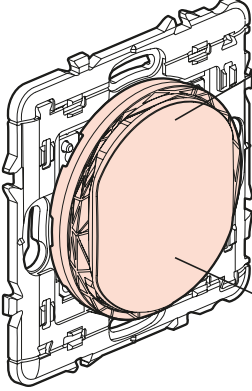


Short push --> ON/OFF
Long push --> Dim +25%
(2 short pushes --> OFF)

Short push --> ON/OFF
Long push --> Dim -25%
(2 short pushes --> OFF)

Frequency bands: 2.4 - 2.4835 GHz
Power level: < 20 mW


 Setup button

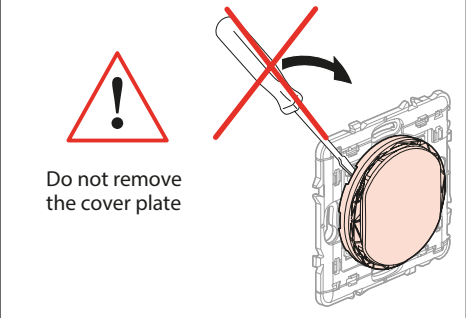


LE14355A-EN

① Start the configuration

Press the configuration button of Module Control or press the middle of the wireless master switch or on the configuration button of the mobile gateway power outlet until its light briefly turns green, and then stop pressing. All wired products lights will turn green.

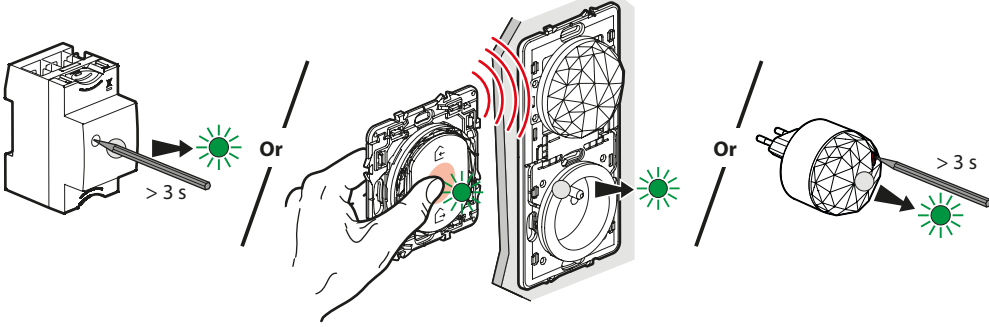


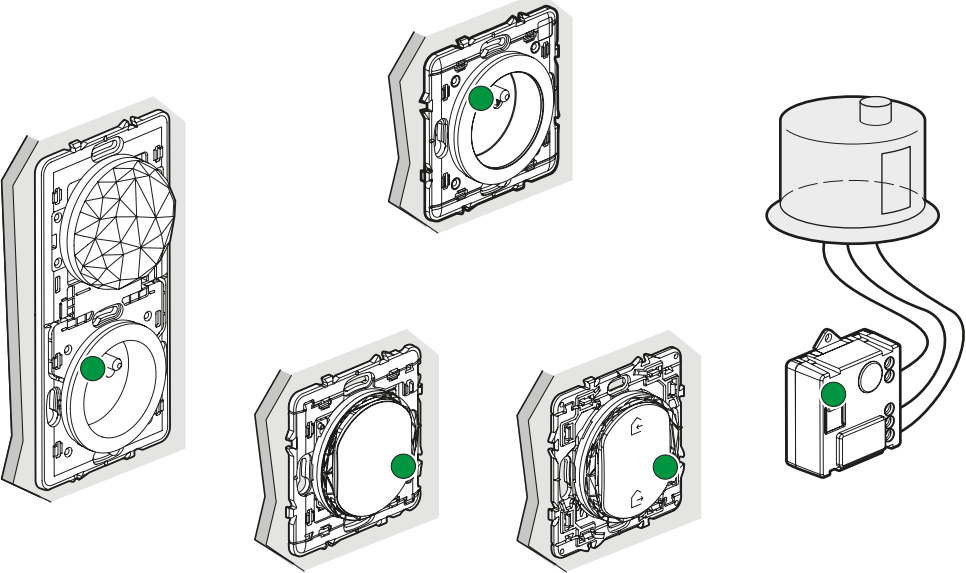


② Pair the wireless, batteryless switch to control the connected products (switch, micromodule, socket-outlet, latching relay).

 Make sure that the indicator lights on the wired products are green and not flashing. If not, go back to precedent step. ①.


A1

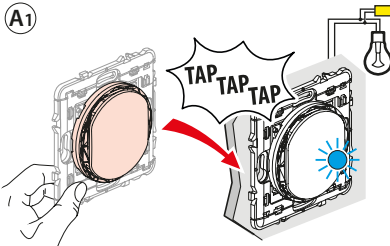


A1

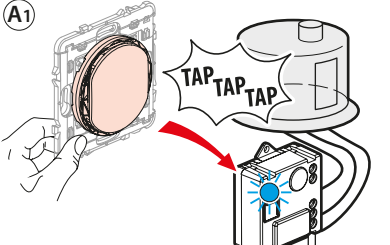


A2

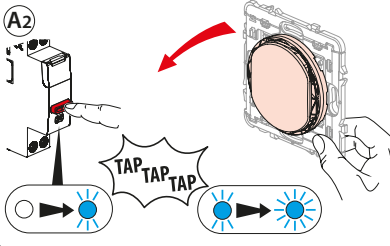


B




B




B




C



C




C



Check the correct pairing by pressing ON/OFF buttons


Multiple pairing: You can control several switches with the same wireless, batteryless switch by repeating the operation for each product that you want to control.

③ Complete the installation

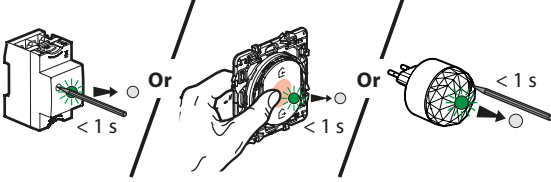


To complete your installation, **briefly** press the configuration of the **Module Control** or the middle of the **wireless Home / Away master switch** or on the configuration button of the **mobile gateway power outlet**.
All the indicator lights on the products switch off

If necessary, erase the configuration of the wireless batteryless control (factory reset)

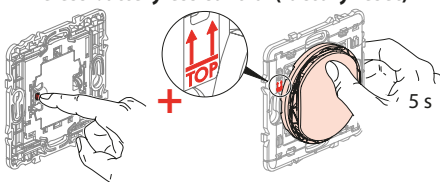

While holding the "setup" button on the wireless, batteryless control, press the upper button for 5 seconds.
Confirm that your control is correctly reset by making an ON command, then OFF

 Before fixing the wireless control(s) with the removable stickers provided, test one on a non-visible area of the wall.

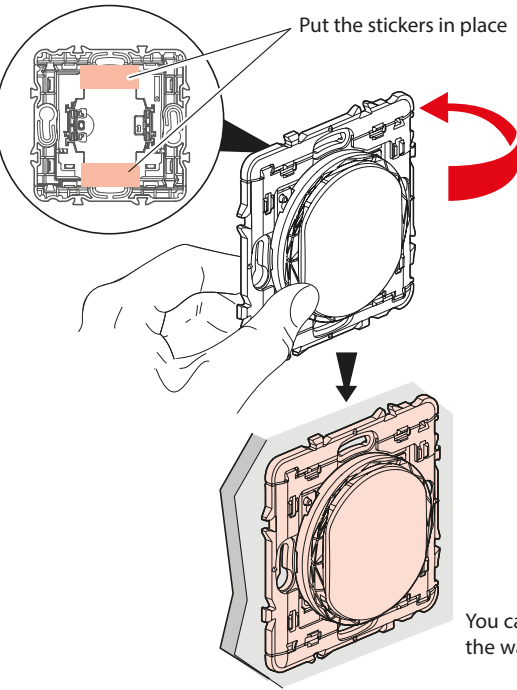

H < 2 m ✓
H > 2 m ✗

You can also fix the wireless control(s) permanently to the wall with screws.

 The undersigned, Legrand declares that the radio-electric equipment type (0 677 23L/73L/79L - CB0420/CT0420/CN0420 - 0 770 53L - 6 000 83L - 5 742 10/39/55 - 5 743 24 - 7 418 13L/43L/73L) complies with directive 2014/53/EU.
The full text of the EU declaration of conformity is available on the following

Download the app

Your installation is ready. You can download the **Legrand Home + Control** application to control your lights remotely.



 FCC ID: 2ACN8-ZLGP1X

IC: 12132A-ZLGP1X

Model : ZLGP17

FCC NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception which can be determined by turning the equipment off and on, the user is encouraged to try to correct interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

 **Safety instructions**
Make sure the power supply is disconnected before any intervention.
Strictly comply with instructions for installation and use.

 **green power**
certified by connectivity standards alliance
Model: ZLGP17

3

4