


	Power Supply: 230V~ 50Hz DALI BUS : 16-18V $\equiv$ KNX BUS : 30V $\equiv$
	Power Supply: 45mA DALI BUS : 150mA max KNX BUS : 10mA max
	2 x 2,5 mm ²
	x = 4
	4 x (Ø 0,6 mm <  < Ø 0,8 mm)
	-5°C → +45°C

USB Type-C interface
for DALI configuration

KNX BUS connection

Power supply

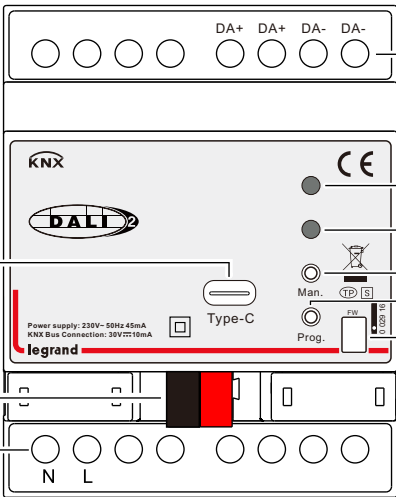

DALI BUS connection


Manual mode LED indicator

KNX programming LED indicator

Manual mode button

KNX programming button

Firmware upgrade interface

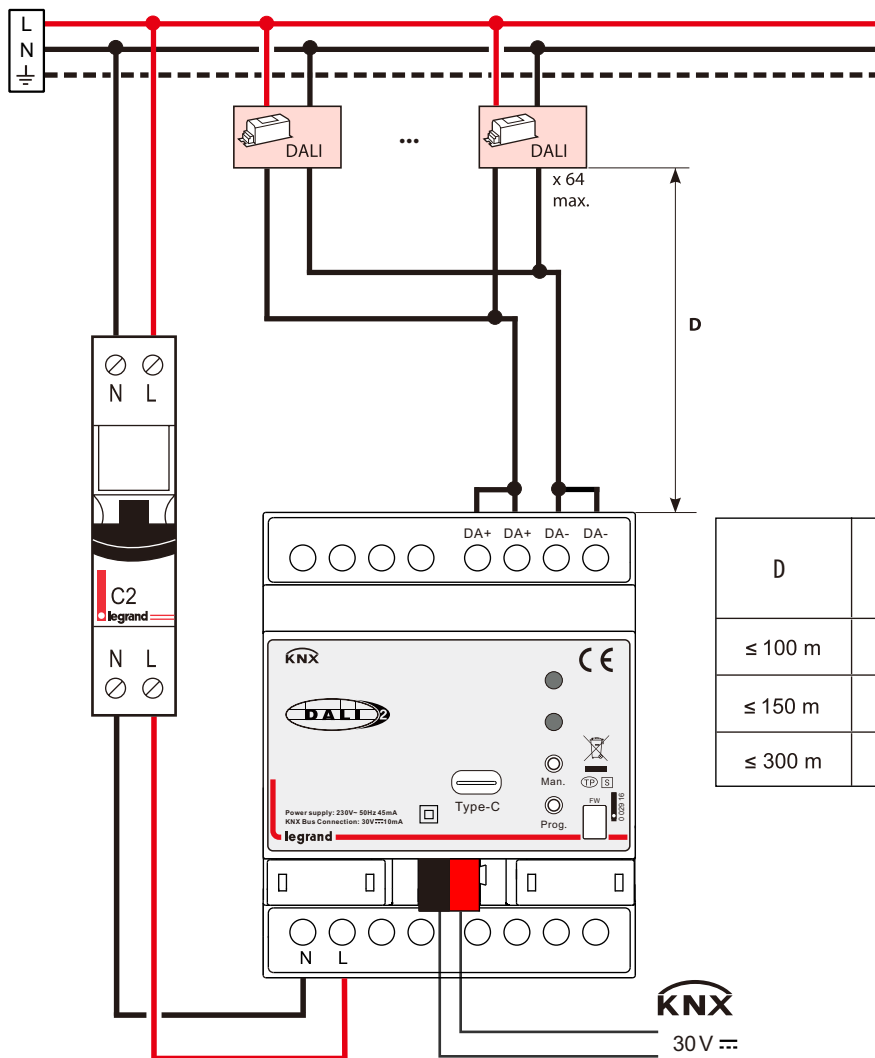

D	
≤ 100 m	0,5 mm ²
≤ 150 m	0,75 mm ²
≤ 300 m	1,5 mm ²

