

Nécessite l'installation préalable d'un pack de démarrage connecté "... with Netatmo".

Module Control

Prise Control et Commande générale sans fil Départ/Arrivée

Prise Control mobile

Ou

Ou

Composition du pack :

Commande Lever/Coucher

Lever

Coucher

Adhésif x2

Bouton de configuration

Bande de fréquences : 2,4 à 2,4835 GHz

Niveau de puissance : < 20 mW

Ne pas démonter le doigt de commande

LE14353AA-FR

① Démarrez la configuration de la commande sans fil, sans pile

Appuyez sur le bouton de configuration du Module Control **ou** au centre de la Commande générale sans fil Départ/Arrivée ou sur le bouton de configuration de la Prise Control Mobile **jusqu'à** ce que le voyant s'allume brièvement en vert, **puis relâchez l'appui**. Tous les voyants des produits câblés s'allument en vert fixe.

> 3 s

Ou

> 3 s

Ou

> 3 s

H < 2 m

H > 2 m

Vous pouvez aussi fixer, de manière définitive, la(les) commande(s) sans fil au mur en utilisant des vis.

2

② Associez la commande sans fil, sans pile à votre installation connectée.

Assurez-vous que les voyants des produits câblés sont toujours vert fixe. Sinon, recommencez l'étape ①.

A1

A2

B

B

C

C

A1) Tapotez 3 fois n'importe quel produit filaire "with Netatmo" avec la commande sans fil, sans pile "Lever/Coucher". Le voyant du produit clignote rapidement.

A2) Pour le cas spécifique du télérupteur, appuyez sur le bouton principal du télérupteur jusqu'à ce que le témoin de configuration clignote lentement en bleu, le relâcher puis le tapotez 3 fois avec la commande sans fil, sans pile "Lever/Coucher". Le voyant du télérupteur clignote rapidement.

B) Tout en maintenant l'appui sur le bouton «configuration» de la commande sans fil, sans pile, appuyez brièvement sur le bouton "Lever" ou "Coucher" de la commande sans fil, sans pile.

C) Le voyant du produit s'allume brièvement en bleu fixe, puis redevient vert, l'association est réussie.

Finalisez la configuration des scénarios à l'aide de votre application HOME + CONTROL, menu "Réglages", puis "Scénarios"

③ Finalisez la configuration

< 1 s

Ou

< 1 s

Ou

< 1 s

Pour terminer votre installation, appuyez **brièvement** sur le bouton de configuration du **Module Control** ou au centre de la **Commande générale sans fil Départ/Arrivée** ou sur le bouton de configuration de la **Prise Control Mobile**.
Tous les voyants des produits s'éteignent.

En cas de besoin, effacez la configuration de la commande sans fil, sans pile

5 s

Tout en maintenant l'appui sur le bouton "configuration", appuyez sur le bouton "Lever" de la commande sans fil, sans pile pendant 5 secondes.
Validez que votre commande est correctement réinitialisée en effectuant une commande "Lever", puis "Coucher"

3

⚠ Consignes de sécurité

Avant toute intervention, couper le courant.
Respecter strictement les conditions d'installation et d'utilisation.

FR LU BE CH

green power

certified by connectivity standards alliance

Model: ZLGP16


4

Requires to install the connected starter pack and one or more «... with Netatmo» connected switch, micromodule or socket outlet

Module Control

Gateway power outlet and home/away wireless master switch


Mobile gateway power outlet

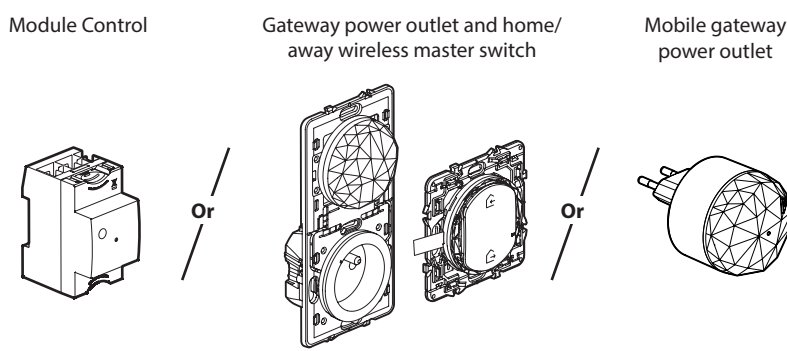

Pack contents:


Wake Up/Sleep control


Stickers x2

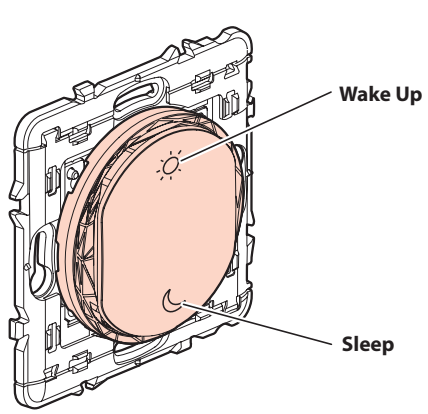

Frequency bands: 2.4 - 2.4835 GHz
Power level: < 20 mW

Setup button

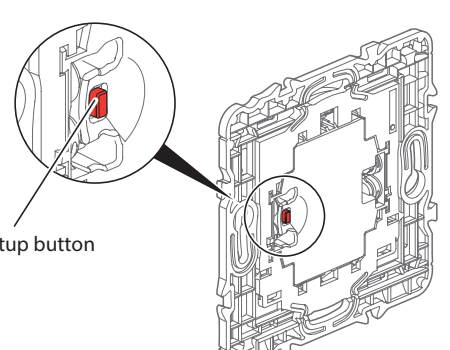


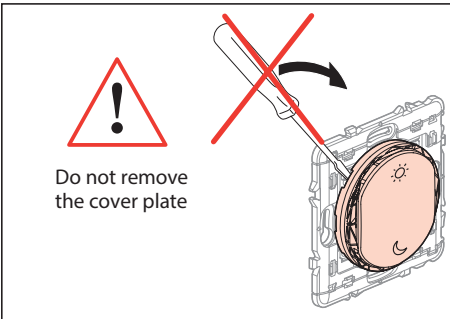


LE14353AA-EN

① Start the configuration

Press the configuration button of Module Control or press the middle of the wireless master switch or on the configuration button of the mobile gateway power outlet until its light briefly turns green, and then stop pressing. All wired products lights will turn green.

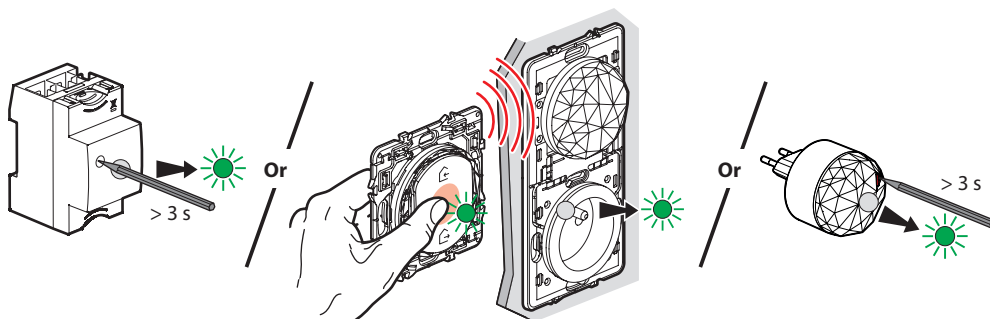

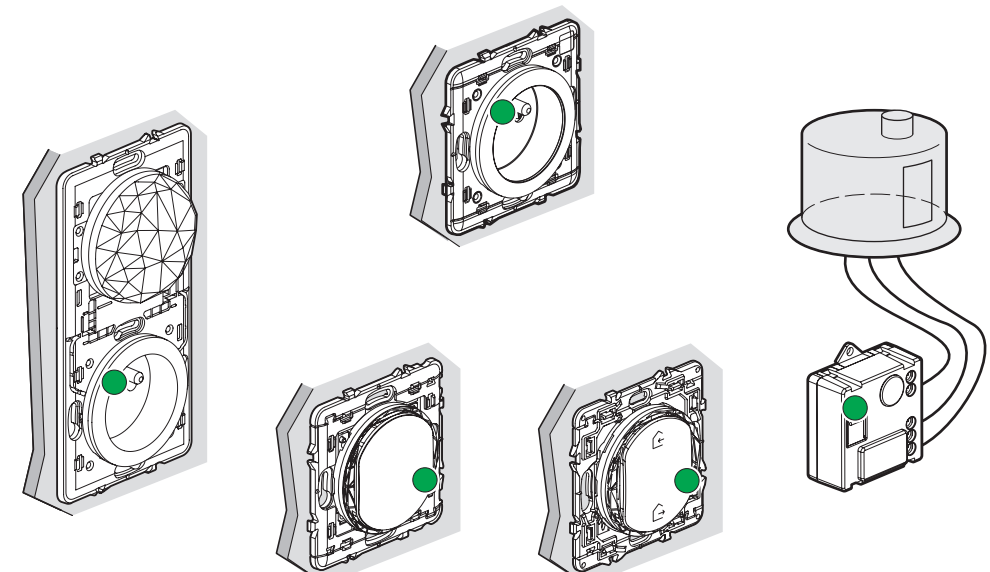


2


② Pair the wireless, batteryless switch to your connected installation.

 Make sure that the indicator lights on the wired products are green and not flashing. If not, go back to step ①.


A1

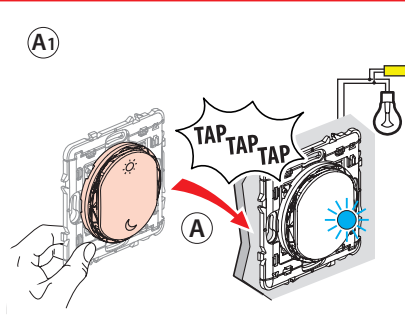


B

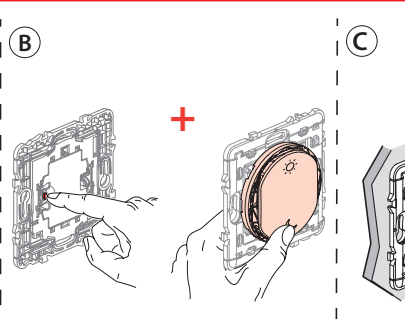


C

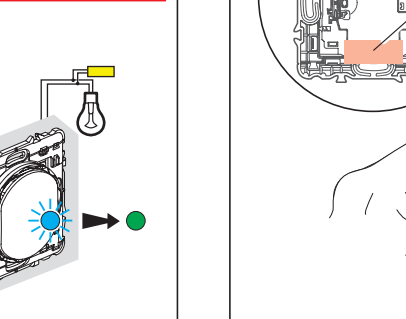


A2

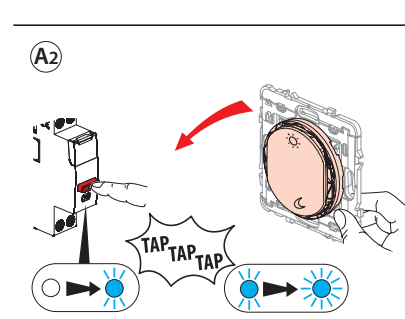

B

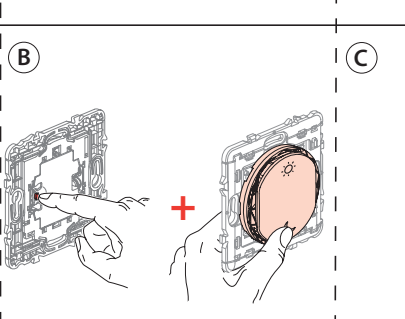

C

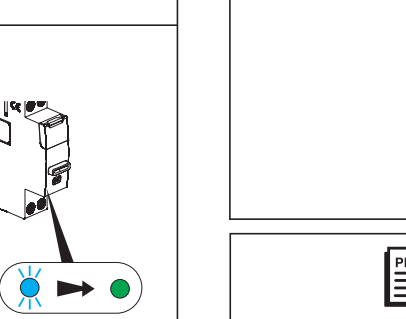

A1 Tap 3 times any wired product "with Netatmo" with the wireless, batteryless "Wake Up/Sleep control". The light of the wired product flashes rapidly.


A2 For the specific case of the latching relay, press the main button of the latching relay until the configuration indicator flashes slowly in blue, release it then tap it 3 times with the wireless, batteryless "Wake Up/Sleep control". The indicator light of the wired product flashes rapidly.

B While holding the "setup" button on the wireless, batteryless control, briefly press the "Wake Up" or "Sleep" control on the wireless batteryless control.

C The indicator light of the wired product will briefly turn blue, and then will turn green again. The pairing was successful.


Complete the configuration of the scenarios using your HOME + CONTROL application, menu "Settings", then "Scenarios"

③ Complete the installation

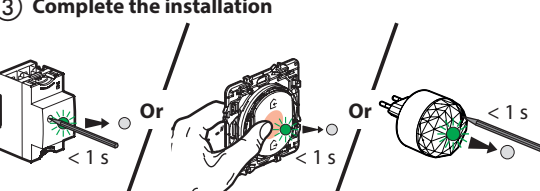



To complete your installation, **briefly** press the configuration of the **Module Control** or the middle of the **wireless Home / Away master switch** or on the configuration button of the **mobile gateway power outlet**.
All the indicator lights on the products switch off

If necessary, erase the configuration of the wireless batteryless control (factory reset)

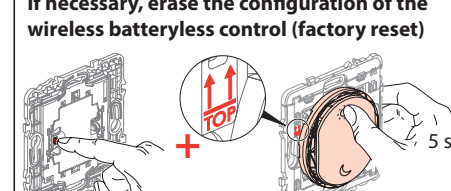

While holding the "setup" button on the wireless batteryless control, press the "Wake Up" button for 5 seconds.
Confirm that your control is correctly reset by making an "Wake Up" command, then "Sleep"

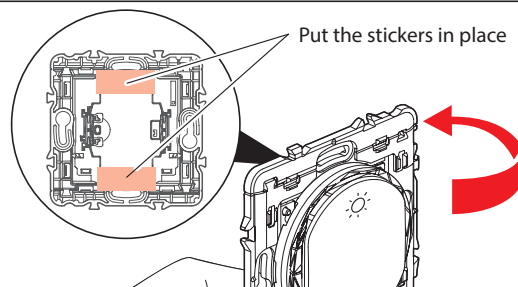

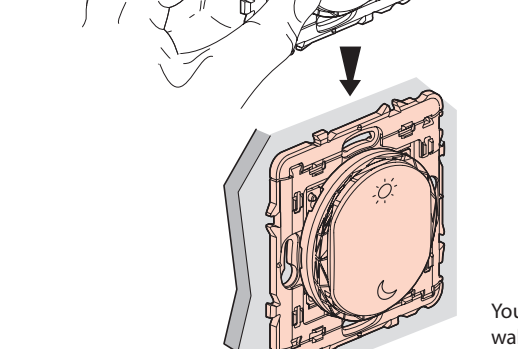

Put the stickers in place

 Before fixing the wireless control(s) with the removable stickers provided, test one on a non-visible area of the wall.


H < 2 m ✓
H > 2 m ✗

You can also fix the wireless control(s) permanently to the wall with screws.



The undersigned, Legrand declares that the radio-electric equipment type (0 648 84L/85L - 0 677 86L - CB0423/CT0423/CN0423 - 0 770 57L - 6 000 84L - 5 742 87/93 - 5 743 22 - 5 748 36 - 7 418 03L/33L/63L) complies with directive 2014/53/EU. The full text of the EU declaration of conformity is available on the following website:

Download the app
Your installation is ready. You can download the **Legrand Home + Control** application to control your lights remotely.





FCC ID: 2ACN8-ZLGP1X

IC: 12132A-ZLGP1X

Model : ZLGP16

This device contains licence-exempt transmitter(s)/receiver(s) that comply with FCC RF and Innovation, Science and Economic Development Canada's licence-exempt RSSI(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

This device complies with FCC and ISSED radiation exposure limits set forth for general population. This device must not be co-located or operating in conjunction with any other antenna or transmitter.

FCC Caution: the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception which can be determined by turning the equipment off and on, the user is encouraged to try to correct interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**Safety instructions**

Make sure the power supply is disconnected before any intervention.
Strictly comply with instructions for installation and use.

**green power**

certified by connectivity standards alliance
Model: ZLGP16