



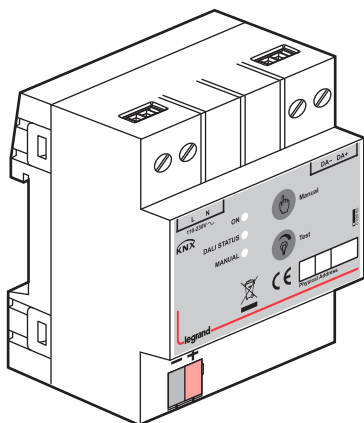

	29V $\approx$
	4 x ($\varnothing 0,6 < \text{---} < \varnothing 0,8$) 8 mm
$x =$	$x = 4$
	- 5°C $\rightarrow$ + 45°C

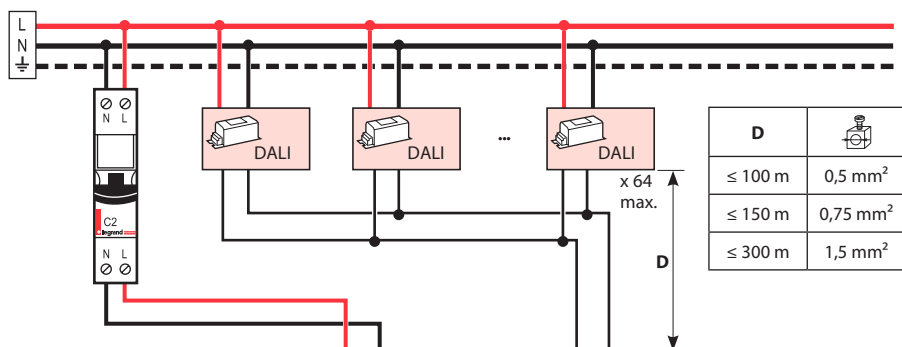

D	
$\leq 100 \text{ m}$	0,5 mm ²
$\leq 150 \text{ m}$	0,75 mm ²
$\leq 300 \text{ m}$	1,5 mm ²

- LED ON verte
- Operating Led, Green
- LED verde ON

- LED DALI jaune
- DALI Status Led, Yellow
- LED giallo DALI

- LED manuel rouge
- Manual Led, Red
- LED manuale rosso

- Bouton de programmation KNX
- KNX programming button
- Pulsante programmazione KNX

- Bouton manuel
- Manual Button
- Pulsante manual

- Bouton test
- Test Button
- Pulsante test

- LED de programmation KNX
- KNX programming led
- LED di programmazione KNX

29 V $\approx$ **KNX**