



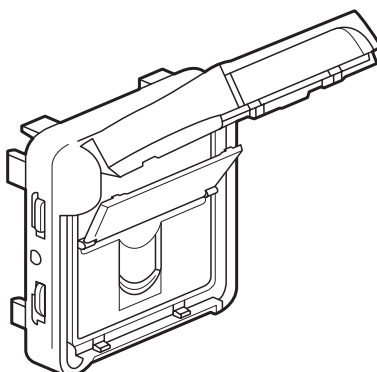

1. INTRODUCTION

Plexo Cat. 5e RJ45 sockets - IP 55 closed flap IK 07



Identification number
UTP: SA01
FTP: SA02

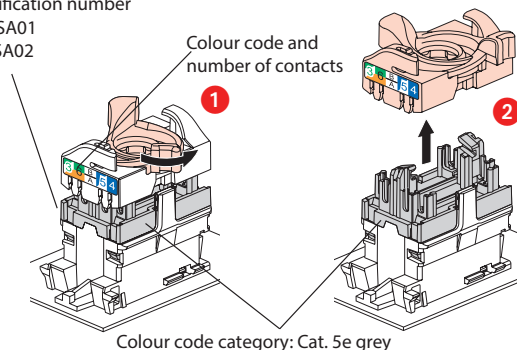

2. DESCRIPTION

- Fast-connection tool-free sockets with connector
- Accepted cable Solid/Stranded : 0.4 to 0.65 mm, AWG 26 to 22
- Contacts marked with dual colour code and numbers T568 Aand T568B
- Conforming to standards ISO/IEC 11801 edition 3.0 (2017) and EIA/TIA 568 C2-1
- Protection against water, dust
- For industrial sites
- UTP or FTP socket
- Grey

Cat. No.	Category	UTP	FTP
0 695 56	5e	X	
0 695 57	5e		X



3. TECHNICAL CHARACTERISTICS

3.1 Materials

Contacts: gold/nickel, minimum gold thickness >0.8 µm
Metal parts: bronze, nickel, platinum, gold
Polycarbonate, PBT, PP

3.2 Electrical characteristics

Breakdown voltage ≥ 1000 V
Contact resistance ≤ 20 mΩ
Insulation resistance ≥ 500 MΩ at 100 VDC
Tested and independently certified to comply with IEC 60512-99-001 and IEC 60512-99-002 for PoE support up to 90w (Type 4).


3.3 Mechanical characteristics

Max. number of connections and disconnections: 5 without replacing the wire
Endurance: 2500 operations (mating/extraction)
IK03


3.4 Climate characteristics

Operating temperatures: -10°C to +60°C
Humid heat 21-day cycle


4. DIMENSIONS

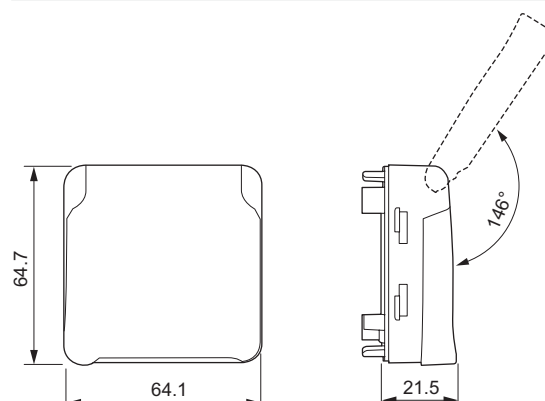

5. INSTALLATION

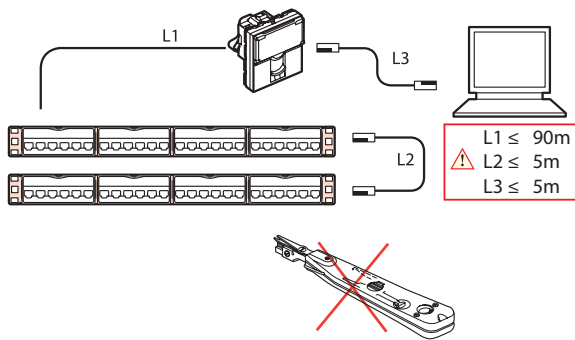

Plexo RJ45 sockets can be flush- or surface-mounted on all single-gang, multi-gang boxes and cable glands in the Plexo range.

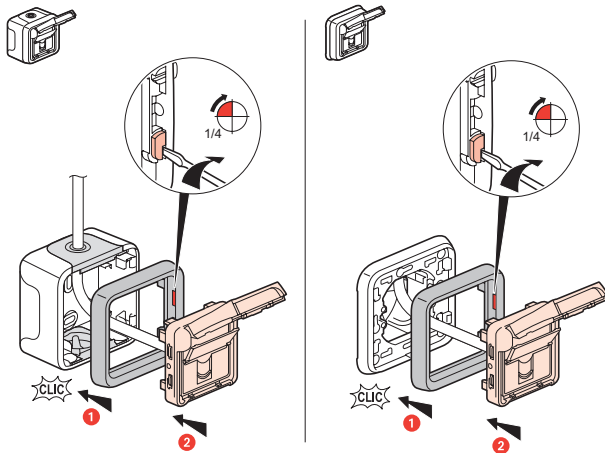


6. TYPICAL RJ45 CONNECTION

Takes the following plugs:

RJ11 (4 contacts), RJ12 (6 contacts), RJ45 (9 contacts).

T568A and T568B dual colour code on terminals:

- UTP (8 contacts)
- FTP (9 contacts)

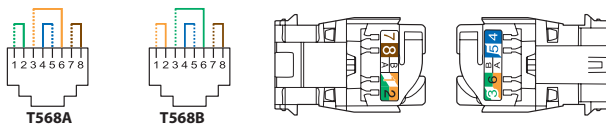


Permissible conductors:


- Solid/stranded: 0.4 to 0.65 mm, AWG 26 to 22
- Polyethylene conductor insulation: Ø 0.85 to 1.7 mm on insulation

Number of wires to be connected per connection: 1

RJ45 connectors are equipped with a locking nut. They do not require a special tool and can be re-wired if a mistake is made.

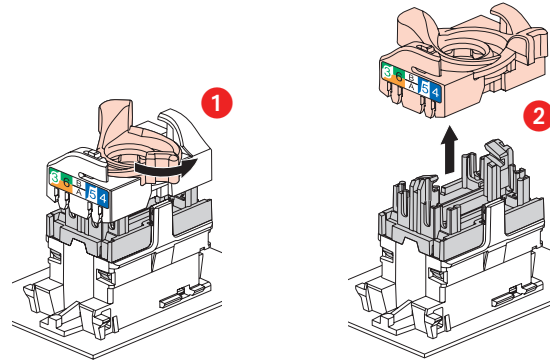

This system makes it easy to spread pairs before fitting them onto the connector.

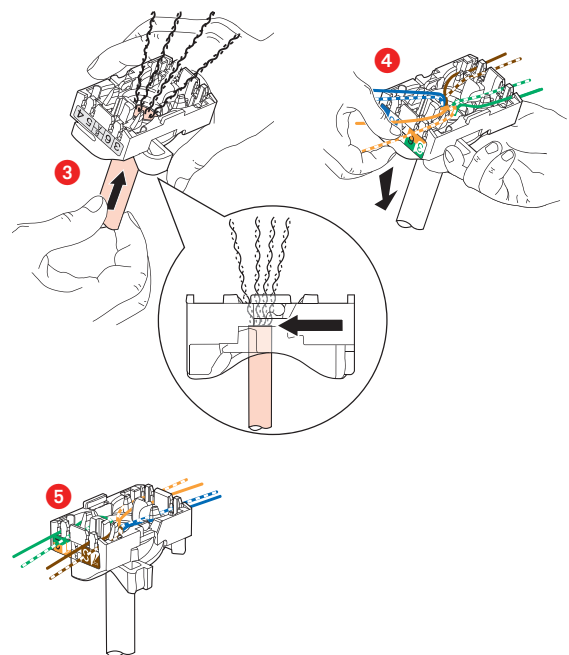


Spreading the cables allows you to ensure that a pair-breakage distance of 13 mm is kept between each pair.
Spreading pairs at 90° to the cable ensures the best possible performance.


7. PERFORMANCE

7.1 Performance of components (RJ45 connectors)


Return loss

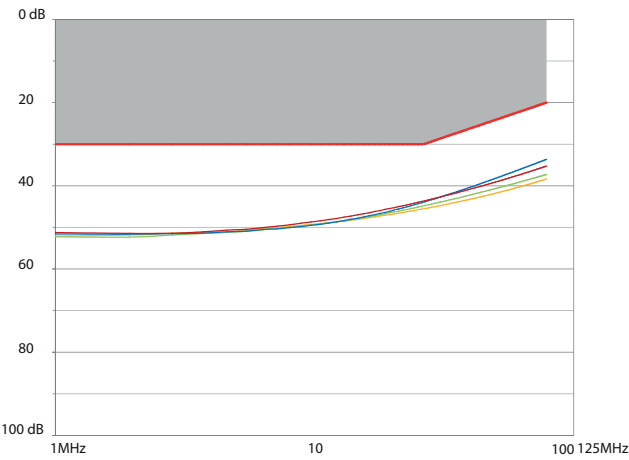


Attenuation

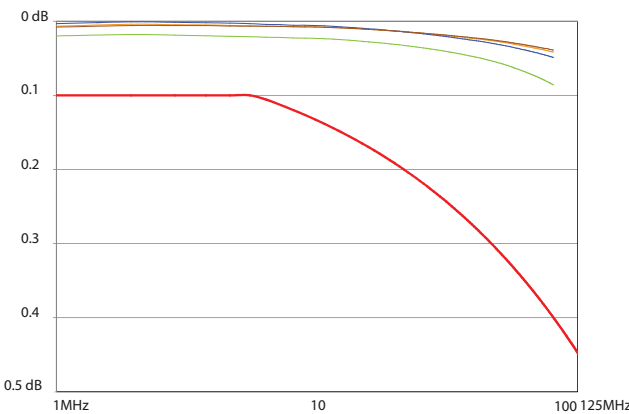

NEXT (Near End Crosstalk Attenuation)

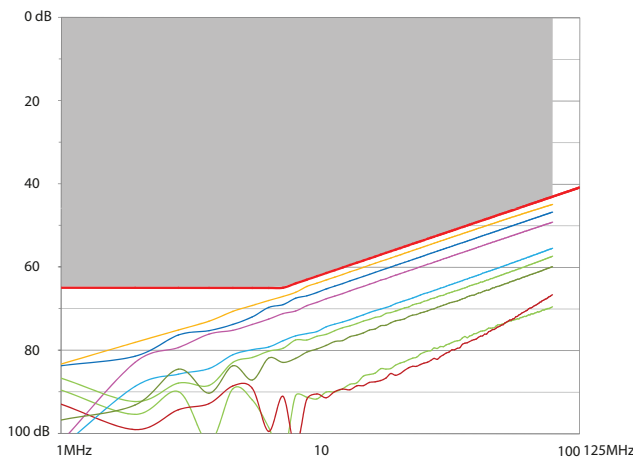


FEXT (Far End Crosstalk Attenuation)

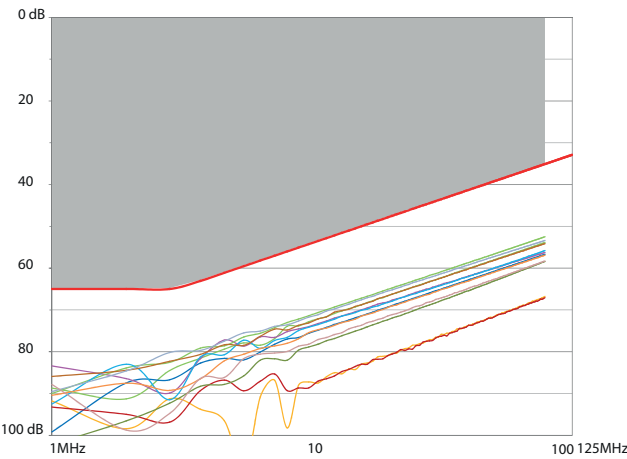


7.2 Performance of permanent link with F/UTP cable


Return loss

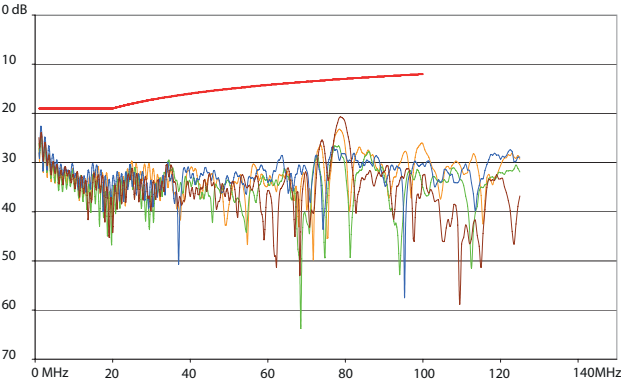


Attenuation

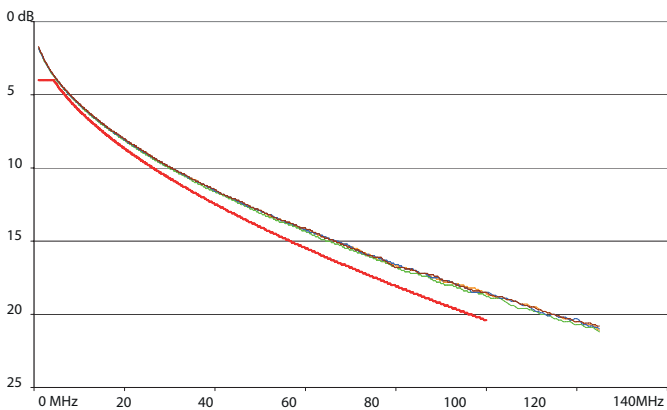


NEXT (Near End Crosstalk Attenuation)

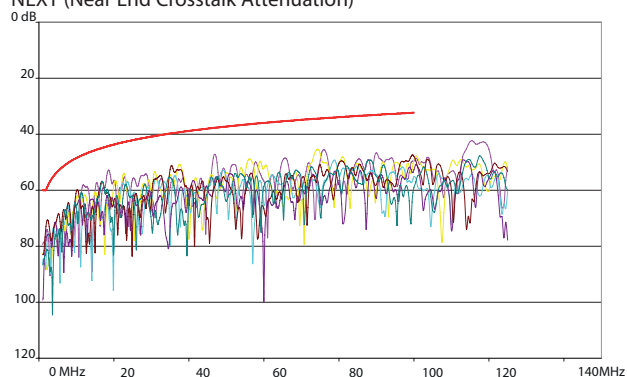


ELFEXT (Equal Level Far End Crosstalk Attenuation)

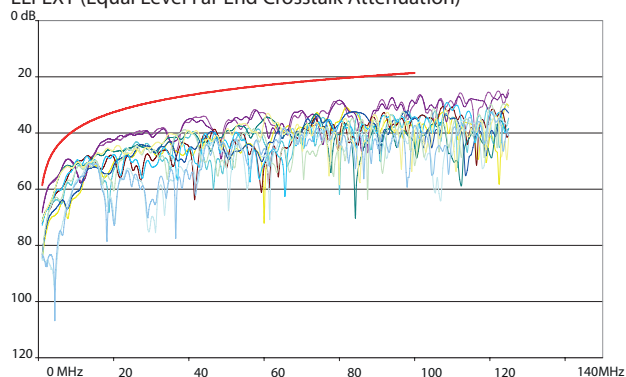

PS NEXT (Power Sum NEXT)

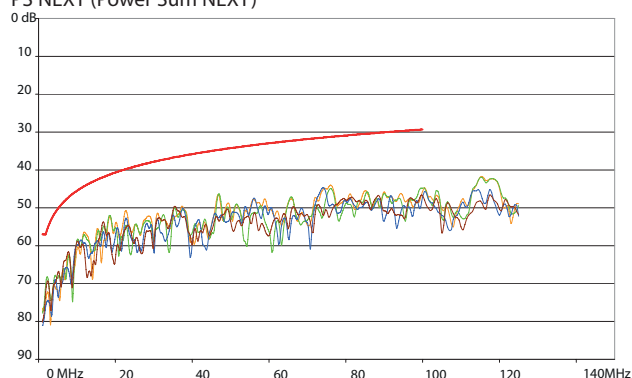

ACR (Attenuation to Crosstalk Ratio)

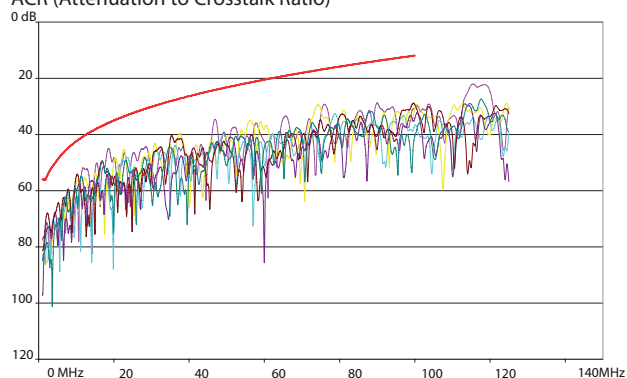

8. STANDARDS AND APPROVALS

ISO/IEC 11801 series : International standard for generic cabling for customer premises

ANSI/TIA 568 series : North American standard for generic cabling for customer premises

EN 50173 series : European standard for generic cabling for customer premises

IEC 60603-7 series : International standard for connector specifications

Connectors are compliant to requirements for the following remote powering applications

IEEE 802.3af , IEEE 802.3at , IEEE 802.3bt : "Power over Ethernet", Types 1 to 4, up to 90W.