


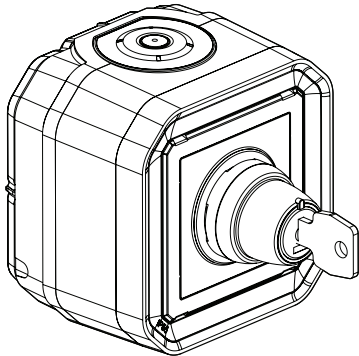


1. USE

Waterproof equipment system intended for residential and professional technical locations (garages, cellars, car parks, workshops and industrial kitchens, etc.) as well as outdoor environments (terraces, gardens, campsites, etc.).
Relay command mechanisms with key release.

2. RANGE

		References: Designations
Surface-mounting complete		0 697 37L : Fireman stop relay command 2 NO contact
		0 69738L : Rearming relay command 2 NO contact

3. OVERALL DIMENSIONS (mm)

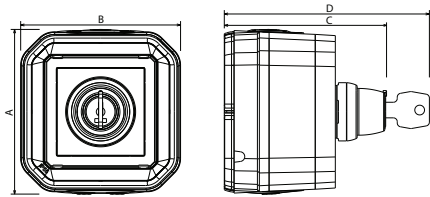

	A	B	C	D
0 697 37L/38L	84.5	82	83.3	105.3

4. CONNECTION

Type of terminals: screw
Terminal capacity: 1.5 mm² - 2.5 mm² (1 or 2 conductors)
Stripping length: 8 mm

5. TECHNICAL CHARACTERISTICS

- **5.1 Protection index**
Protection against solid bodies and liquids: IP 55
Protection against impact: IK 07
- **5.2 Material characteristics**
Box, entry gland: PP + SEBS
Support : PC + SEBS
Mechanism: PC
UV-resistant
Halogen-free
Resistance to salt spray: 7 days (168 h)
Self-extinguishing:
850°C/30 s for insulating components holding live parts in place.
650°C/30 s for other insulating components.
- **5.3 Electrical characteristics**
2 NO contacts with 10A breaking capacity at 250V~ 50/60Hz
or 1.5A at 24V=
- **5.4 Climate characteristics**
Usage temperature: - 10° à + 40° C
Storage temperature: - 25° C à + 60° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.
Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products, Pre-saturated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e. catalogue.