

Acti9 iC60H miniature circuit breakers

10kA, B curve, 6-63A

IEC/EN 60947-2

IEC/EN 60898-1

Acti9 iC60H微型斷路器

10kA，B型曲線，6-63A

IEC/EN 60947-2

IEC/EN 60898-1



A9F83116



A9F83210




A9F83320

Type 類型	Wid. in mod. of 9mm 寬度 9mm 倍數	Rated current 額定電流 (A)	Part no. 產品編號
1-pole 極	2	6	A9F83106
		10	A9F83110
		16	A9F83116
		20	A9F83120
		25	A9F83125
		32	A9F83132
		40	A9F83140
		50	A9F83150
2-pole 極	4	63	A9F83163
		6	A9F83206
		10	A9F83210
		16	A9F83216
		20	A9F83220
		25	A9F83225
		32	A9F83232
		40	A9F83240
3-pole 極	6	50	A9F83250
		63	A9F83263
		6	A9F83306
		10	A9F83310
		16	A9F83316
		20	A9F83320
		25	A9F83325
		32	A9F83332
		40	A9F83340
		50	A9F83350
		63	A9F83363

Remarks: Part no. of 4-pole, C or D curves circuit breaker can be provided upon request.

註：有關 4 極、C 或 D 型曲線斷路器的產品編號可向銷售部門查詢。

Dimensions 尺寸

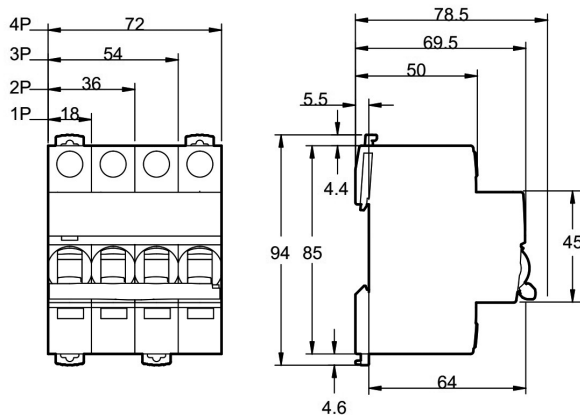

Application

Control and protection of circuits against overloads and short circuits:

- in domestic installations;
- in commercial and industrial electrical distribution systems.

Technical Data

- rated current : 6-63A set at 30°C;
- tripping characteristics :
 - B curve : the magnetic releases operate between 3 and 5 In;
 - breaking capacity (IEC/EN 60898-1) :

Rate current (A)	Type	Voltage (V)	Breaking capacity (kA)
6-63	1-pole	230	10
	2/3-pole	400	10

- positive contact indication;
- number of operating cycles (O-C) : 20000;
- tropicalisation : treatment 2 (relative humidity 95% at 55°C);
- weight (g) :

Type	1-pole	2-pole	3-pole
	215	250	375

- connections : tunnel terminals for the following cables

- 16mm² flexible or 25mm² rigid up to 25A ratings;
- 25mm² flexible or 35mm² rigid for 32-63A ratings;
- complies with IEC/EN 60947-2, IEC/EN 60898-1.

應用

控制及保護電路以防過載和短路：

- 可應用於住宅安裝；
- 可應用於商業及工業配電系統。

技術數據

- 額定電流：環境溫度 30°C 時，電流為 6-63A；
- 脫扣特性：
 - B 型曲線：瞬時脫扣 3-5 In；
 - 分斷能力 (IEC/EN 60898-1)：

額定電流 (A)	類型	電壓 (V)	分斷能力 (kA)
6-63	1 極	230	10
	2/3 極	400	10

- 正接觸顯示；
- 機械壽命 (O-C) : 20000 次；
- 熱帶氣候處理：第 2 級 (溫度 55°C 時，相對濕度 95%)；
- 重量 (克)：

類型	1 極	2 極	3 極
	215	250	375

- 接線：使用套管端子

- 25A 及以下可接 16mm² 軟線或 25mm² 硬線，
- 32-63A 可接 25mm² 軟線或 35mm² 硬線；
- 符合 IEC/EN 60947-2，IEC/EN 60898-1 標準。