



A9S65240



A9S65340

Type	Wid. in mod. of 9mm	Rated current	Voltage	Part no.
類型	寬度 9mm 倍數	額定電流 (A)	額定電壓 (V AC)	產品編號
2-pole 極	4	40	415	A9S65240
	4	63	415	A9S65263
	4	100	415	A9S65291
	4	125	415	A9S65292
3-pole 極	6	40	415	A9S65340
	6	63	415	A9S65363
	6	100	415	A9S65391
	6	125	415	A9S65392
4-pole 極	8	40	415	A9S65440
	8	63	415	A9S65463
	8	100	415	A9S65491
	8	125	415	A9S65492

Function

- on-load opening and closing of a circuit.

Technical Data

- positive contact indication;
- DC use : 48V (110V two serial poles);
- mechanical endurance :
 - I=40-125A : 20000 cycles,
 - electrical endurance : AC22 p.f.=0.6,
 - I=40, 63A : 15000 cycles,
 - I=100A : 10000 cycles,
 - I=125A : 2500 cycles,
- rated short-time withstand:
 - 40A: 1260A; 63A: 1260A; 100A-125A: 1500A
- tropicalization : treatment 2 (95% relative humidity at 55°C);
- connections : tunnel terminals for the following cables
 - ≤ 50mm² rigid cables for 40-125A,
 - ≤ 35mm² flexible cables for 40-125A;
- complies with IEC/EN 60947-3 standard for 40-125A;
- utilization category : AC22A.


功能

- 線路負載開關。

技術數據

- 正接觸顯示；
- 直流應用：48V (110V 兩極串聯)；
- 機械能耐：
- I=40-125A：20000 次，
- 電力能耐：AC22 功率因數=0.6，
- I=40, 63A：15000 次，
- I=100A：10000 次，
- I=125A：2500 次，
- 額定短時耐受：
- 40A: 1260A; 63A: 1260A; 100A-125A: 1500A
- 熱帶氣候處理：第 2 級 (溫度 55°C 時，相對濕度 95%)；
- 接線：使用套管端子
- 40-125A 可接 ≤ 50mm² 硬線，
- 40-125A 可接 ≤ 35mm² 軟線，
- 40-125A 符合 IEC/EN 60947-3 標準；
- 使用類別：AC22A。

Dimensions 尺寸

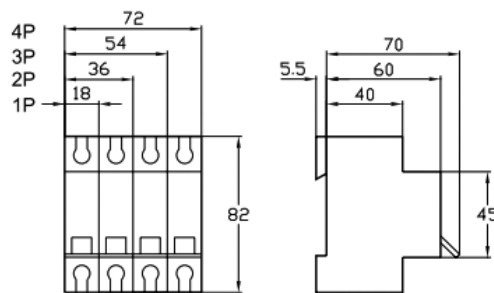

40 to 125 A iSW


Compact INS Switch Disconnectors IEC/EN 60947-3




31106

Type	Rating (A)	Part no.
類型	額定電流	產品編號
INS160	160	28912 28913
INS250-100	100	31100 31101
INS250-160	160	31104 31105
INS250-200	200	31102 31103
INS250	250	31106 31107

Compact INS 隔離開關 IEC/EN 60947-3

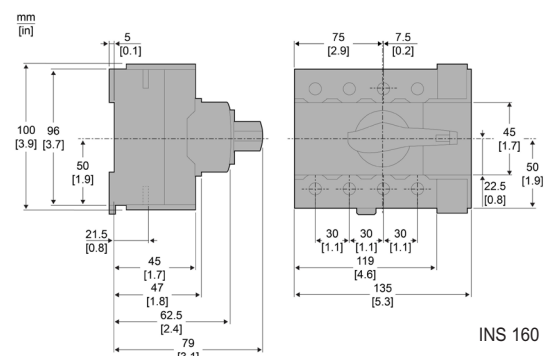

INS 160

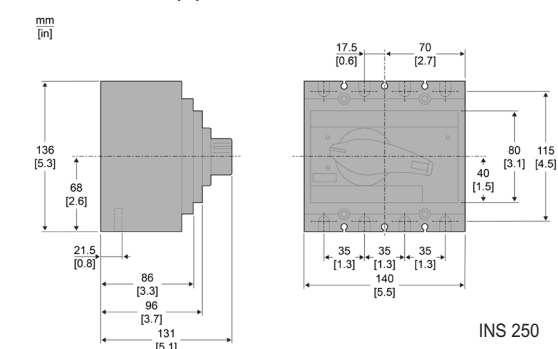

INS 250