

COMPALUX LED

UGR<19



STANDARDS



OPTIONS



FR



Données mécaniques

Montage: Encastré par dessus sur les faux plafonds modulaires ou par le dessous dans les plafonds en plâtre découpés à l'aide des brancards
Corps : tôle d'acier électrozingué
Finition peinture : époxy blanc ou autre couleurs sur demande



Données électriques

Source lumineuse : modules LED intégrés
Alimentation : 220-240V 50-60 Hz
Équipement : Driver LED (gradation sur demande)



Données optiques

Modèle d'éclairage : Indirect
Répartition de la lumière : Symétrique
Système optique : Déflecteur en tôle d'acier micro-perforée ou pleine



Données complémentaires

Application : bureaux , locaux scolaires , salles de réunion , espaces commerciaux , hôpitaux hôtels



Accessoires (en option)

Kit chantier : Filin de sécurité et film de protection
Brancards : 4 brancards pour montage sur les faux plafonds découpés (lay-out)
Pré câblé en DALI, Push DIM sur demande
Connexion rapide (WAGO, ENSTO, WIELAND)
Capteur de luminosité et capteur de présence

EN

Mechanical data

Mounting: Recessed from above on modular false ceilings or from below in plaster ceilings cut using fixing-brackets
Body: electro-galvanized steel sheet.
Paint finish: white epoxy or other colors on request

Electrical data

Light source: integrated LED modules
Power supply: 220-240V 50-60 Hz
Equipment LED driver (dimming on request)

Optical data

Lighting model: Indirect
Light distribution: Symmetrical
Optical system: Micro-perforated or solid sheet steel deflector


Additional data

Application offices, school premises, meeting rooms, commercial spaces, hotels, hospitals

Accessories (optional)

Construction kit: safety rope and protective film
Brackets: 4 brackets for mounting on cut-out false ceilings (lay-out)
Pre-wired in DALI, Push DIM on request
Quick connection (WAGO, ENSTO, WIELAND)
Light sensor and presence sensor

ARTICLES	 (mm)	 (mm)	 (mm)	A	B
COMPALUX 60*30	595	295	120	580	280
COMPALUX 60*60	595	595	120	580	580
COMPALUX 120*30	1195	295	120	1180	280

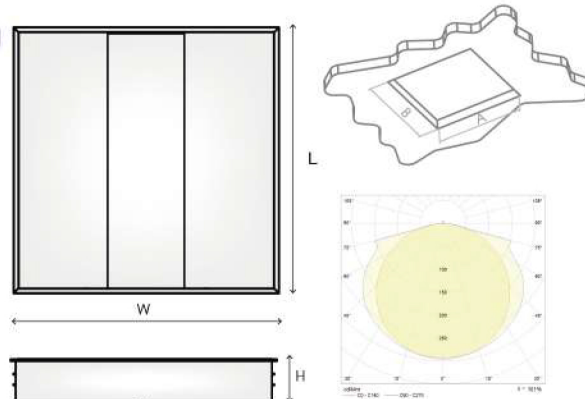

Articles	code	Lm/Output	W	Lm/W	CCT	
COMPALUX LED 60x60 44W 3K	PF0LULED115	2860	44	65	3000K	3.6
COMPALUX LED 60x60 44W 4K	PF0LULED116	3124	44	71	4000K	3.6
COMPALUX LED 60x60 44W 6.5K	PF0LULED117	3212	44	73	6500K	3.6
COMPALUX LED 60x30 22W 3K	PF0LULED767	1430	22	65	3000K	3.6
COMPALUX LED 60x30 22 W 4K	PF0LULED768	1562	22	71	4000K	3.6
COMPALUX LED 60x30 22W 6.5K	PF0LULED769	1606	22	73	6500K	3.6
COMPALUX LED 120x30 44 W 3K	PF0LULED770	2860	44	65	3000K	3.6
COMPALUX LED 120x30 44 W 4K	PF0LULED771	3124	44	71	4000K	3.6
COMPALUX LED 120x30 44 W 6.5K	PF0LULED772	3212	44	73	6500K	3.6

