

OCEAN LED



STANDARDS



FR



Données mécaniques

Corps : En aluminium moulé sous pression
Peinture: De type polystère, effectuée à la poudre résistante aux agents atmosphériques et à la corrosion, et garantie pour 1000 heures en bouillard salin, couleur Gris RAL 7024
Étanchéité: Assurée par un joint en silicone IP66
Fixation: Sur poteaux ou supports murales de diamètres 60mm (autre dimensions sur demande : 42mm, 76mm)



Données électriques

Alimentation : 220-240 v 50-60Hz
LED Driver : Osram DALI, 0-10v sur demande
LED Chips : Lumileds 5050
Protection : Protection contre les surtensions 10kV
Durée de vie : 100 000h L 90/B10



Données optiques

Diffuseur: verre trempé de 5mm d'épaisseur, résistant aux chocs thermiques et au coups.
Matière d'optique: Lentille en PC



Données complémentaires

Adaptés pour l'éclairage des routes
Utilisation: Luminaire spécial conçu pour l'éclairage public éclairage des parkings, chemins et routes, en site rural et résidentiel



Accessoires (en option)

Dispositif de protection contre les surtensions photocellules, prise NEMA, adaptateur de console
Support de montage mural, connecteur IP66
cables préinstallés, Réduction diamètre 42 ou 76

EN

Mechanical data

Body: Die-cast aluminum
painting: Polystere type, made by powder resistant to atmospheric agents and corrosion, and guaranteed for 1000 hours in salt spray, color Gray RAL 7024
waterproofing: Ensured by an IP66 silicone gasket
Fixing: On poles or wall brackets with diameters of 60mm (other dimensions on request: 42mm, 76mm)

Electrical data

Power supply: 220-240v 50-60Hz
LED Driver: Osram DALI, 0-10v on request
LED Chips: Lumileds 5050
Protection: 10kV surge protection
Lifespan: 100 000h L 90 / B10

Optical data


Diffuser: 5mm thick tempered glass, resistant to thermal shock and impact.
Optical material: PC lens

Additional data


Adapted for road lighting
Use: Special luminaire designed for public lighting, lighting of parking lots, paths and roads, in rural and residential sites

Accessories (optional)


Photocell surge protection device, NEMA outlet, console adapter
Wall mounting bracket, IP66 connector
pre-installed cables, Reduction diameter 42 or 76




TYPE 2-MB




TYPE 3-M



TYPE 1-M



TYPE 2-MA

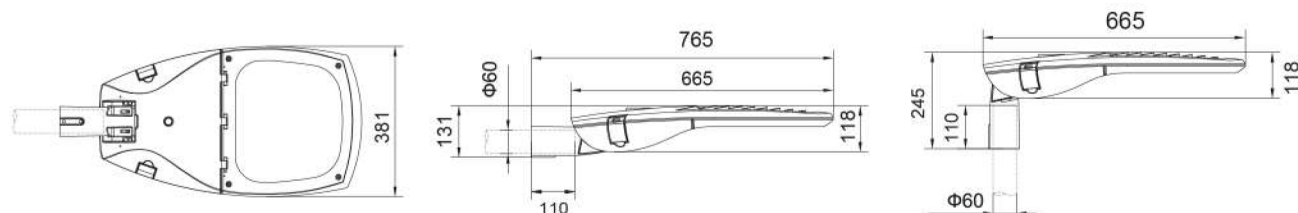

Articles	Code	Lm/Output	W	Lm/W	CCT			
OCEAN LED M 150W 4K	PF0LULED308	22500	150	150	4000K	09:00	1	50
OCEAN LED M 150W 5K	PF0LULED307	22650	150	151	5000K	09:00	1	50
OCEAN LED M 180W 4K	PF2LULED388	27000	180	150	4000K	09:00	1	50
OCEAN LED M 180W 5K	PF2LULED389	27180	180	151	5000K	09:00	1	50
OCEAN LED M 200W 4K	PF0LULED310	30000	200	150	4000K	09:00	1	50
OCEAN LED M 200W 5K	PF0LULED309	30200	200	151	5000K	09:00	1	50