

BELUX LED LO

UGR<19



STANDARDS



OPTIONS



FR



Données mécaniques

Montage: Encastré par dessus sur les faux plafonds modulaires ou par le dessous dans les plafonds en plâtre découpés à l'aide de brancards
Corps: tôle d'acier électrozingué
Finition peinture: époxy blanc ou autres couleurs sur demande



Données électriques

Source lumineuse : modules LED intégrés
Alimentation : 220-240V 50-60 Hz
Équipement : Driver LED (gradation sur demande)
Durée de vie : 50 000h L 80/B10 à 50°C



Données optiques

Modèle d'éclairage : Direct
Répartition de la lumière : Symétrique
Système optique : Double parabole en aluminium brillant



Données complémentaires

Application : bureaux , locaux scolaires , salles de réunion , espaces commerciaux , hôpitaux hôtels



Accessoires (en option)

Brancards : 4 brancards pour montage sur les faux plafonds découpés
Pré câblé en DALI, Push DIM sur demande
Connexion rapide (WAGO, ENSTO, WIELAND)
Capteur de luminosité et capteur de présence
Kit chantier : filin de sécurité et film de protection

EN

Mechanical data

Mounting: Recessed from above on modular false ceilings or from below in plaster ceilings cut using fixing-brackets
Body: electro-galvanized steel sheet.
Paint finish: white epoxy or other colors on request

Electrical data

Light source: integrated LED modules
Power supply: 220-240V 50-60 Hz
Equipment: LED driver (dimming on request)
Lifespan: 50 000h L 80 / B10 at 50° C

Optical data

Lighting model: Direct
Light distribution: Symmetrical
Optical system: Double parabolic in shiny aluminum







Additional data

Application: offices, school premises, meeting rooms, commercial spaces, hotels, hospitals

Accessories (optional)

Brackets: 4 brackets for mounting on cut-out false ceilings
Pre-wired in DALI, Push DIM on request
Quick connection (WAGO, ENSTO, WIELAND)
light sensor and presence sensor
Construction kit: safety rope and protective film

ARTICLES	 (mm)	 (mm)	 (mm)	A	B
60x30 2 LED	595	295	52	580	280
60x60 2 LED	595	595	52	580	580
60x60 3 LED	595	595	52	580	580
60x60 4 LED	595	595	52	580	580
120x30 4 LED	1195	295	52	1180	280

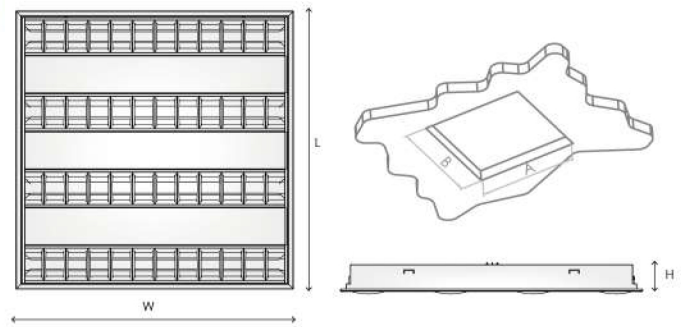

Articles	code	Lm/Output	W	Lm/W	CCT	
BELUX LO 4 LED 60*60 44W 3K	PFOLULED050	4532	44	103	3000K	4
BELUX LO 4 LED 60x60 44 W 4K	PFOLULED051	4752	44	108	4000K	4
BELUX LO 4 LED 60x60 44 W 6.5K	PFOLULED052	4796	44	109	6500K	4
BELUX LO 4 LED 120x30 44 W 3K	PFOLULED053	4532	44	103	3000K	4
BELUX LO 4 LED 120x30 44 W 4K	PFOLULED054	4752	44	108	4000K	4
BELUX LO LED 120x30 44 W 6.5K	PFOLULED055	4796	44	109	6500K	4
BELUX LO 3 LED 60x60 33 W 3K	PFOLULED047	3399	33	103	3000K	4
BELUX LO 3 LED 60x60 33 W 4K	PFOLULED048	3564	33	108	4000K	4
BELUX LO 3 LED 60x60 33 W 6.5K	PFOLULED049	3597	33	109	6500K	4
BELUX LO 2 LED 60x30 22 W 3K	PFOLULED056	2266	22	103	3000K	2.7
BELUX LO 2 LED 60x30 22 W 4K	PFOLULED057	2376	22	108	4000K	2.7
BELUX LO 2 LED 60x30 22 W 6.5K	PFOLULED058	2398	22	109	6500K	2.7
BELUX LO 2 LED 60x60 22 W 3K	PFOLULED044	2266	22	103	3000K	3.7
BELUX LO 2 LED 60x60 22 W 4K	PFOLULED045	2376	22	108	4000K	3.7
BELUX LO 2 LED 60x60 22 W 6.5K	PFOLULED046	2398	22	109	6500K	3.7